


# GL505

Polyester + Acrylic | Latex | Sandy + Smooth

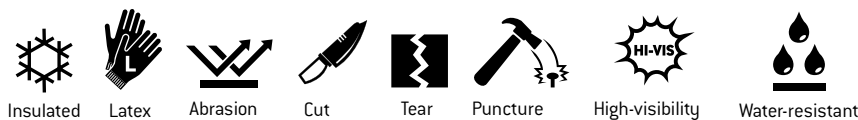

ANSI/ISEA 105-2016 – CUT A2 | PUNCTURE 2 | ABRASION 4  
 EN388: 2016 – 3241X  
 EN511:2006 – X2X

Latex smooth full dipped coating // Double dipped latex sandy palm coating // 13 gauge polyester outer liner // 10 gauge acrylic inner liner // Contact cold protection // Water-resistant // Hi-vis

GL505 S – 2XL

### Suggested Applications

Refrigerated Area // Utilities // Food Processing  
 // Commercial Fishing // Construction // Outdoor Activities

### Glove Breakdown

Type: Insulated Dipped Glove
Material: Latex Sandy + Smooth
Outer Liner: 13 Gauge Polyester
Inner Liner: 10 Gauge Acrylic
Cuff: Polyester + Acrylic + Latex Elastic

This product contains components that may be a potential risk to allergic reactions. Do not use in the event of hypersensitivity signs or a known allergy to latex.

### Testing Performance

EN388: 2016 – 3241X

Abrasion	1	2	3	4		
Circular Blade Cut	1	2	3	4	5	X
Tear	1	2	3	4		
Puncture	1	2	3	4		
Cut TDM-100	A	B	C	D	E	F
Impact Rated	P	F	X			

EN511:2006 – X2X

Convective Cold	1	2	3	4	X
Contact Cold	1	2	3	4	X
Water Penetration	0	1	X		

ANSI/ISEA 105-2016

Cut	1	2	3	4	5	6	7	8	9
Abrasion	1	2	3	4	5	6			
Puncture	1	2	3	4	5				



**i** Product markings may vary. Refer to the product sheet for the most current test report results.

### Glove Sizing

The color of the binding around the cuff indicates the glove size.

Small	Medium	Large	X-Large	2X-Large
7	8	9	10	11

All sizes comply with EN 420:2003 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.

### Packaging

Pack: 12 pair
Case: 120 pair
Country of Origin: China